



Key Features:

- **200V to 420V** Continuous Input Voltage
- 150msec hold time at 660W
- 4200V Isolation Between Input /Output
- Active Input EMI Filtering
- Transient look ahead/cut-off technology
- 6 Voltage output Rails
- Isolated 3.3V aux standby feature
- 1200W Maximum Continuous Power
- 93% Typical Efficiency
- -40°C to 85°C Operating Temperature
- VITA 62 6U Form Factor
- Patent pending **FourRail** thermal interface

VITA 62 6U ISOLATED 1200W 270V nominal input POWER SUPPLY

This 6U power supply works with **270VDC input** and isolates the input voltage ground from the output voltage ground. The power supply is **conduction cooled**, uses **poly-phase** technology on all voltage rails and can provide up to **1200 watts**. It is suitable for use in **mission critical rugged applications**.

[**SMART.PSU**] PCI-Systems Inc. intelligent power supplies integrate a **microcontroller** (MCU) for a fully programmable and flexible solution. Intelligent power conversion allows **configuration and reconfiguration** for different applications. With intelligent power conversion, the power supply becomes a platform solution for Vita 46.11 management based systems. The power supply can easily be **reprogrammed** to support different **operating limits and control inputs**.

Features:

- Parallel operating with multiple power supplies, all rails
- Load sharing and balancing
- Digital On/Off control for low standby power
- Input / Output Voltage rail setting /adjustment
- Spread Spectrum Clocking of power supply stages
- Power supply sequencing and hot-swap control
- Power supply history logging and fault management
- Monitoring all input/output voltages, currents and power
- Current fold back control
- Automatic temperature drift compensation for all outputs
- Total-Elapsed-Time Recorder
- Efficiency calculations at any time
- Communication via SMB/I2C (PMB) for Vita 46.11 system management
- Collects data from temperature sensors for over temperature protection
- Precision compensation of all output voltages using integrated 5ppm voltage reference

Overview	
P/N	PCI_800.312
Hold Up time	150ms/660W 100ms at +85 deg C.
VITA Compliant	VITA62
Size	6U
Temp. Range	-40 +85 C
Input (AC or DC)	270
Input Range (AC)	
Active EMI Filtering	YES
Power (W, max.)	1200
Efficiency (% , typ.)	93
# of outputs	6

OUTPUTS (Total output not to exceed 1200W)	
VS1, V@A	+12@40A
VS2, V@A	+12@40A
VS3, V@A	+5@80A
AUX, V@A	+3.3@20A
AUX, V@A	+12@3A
AUX, V@A	-12@3A

FEATURES	
Over-current Protection	YES
Over-voltage Protection	YES
Over-temperature Protection	YES
Current Sharing	Parallel possible
Remote Sense	YES
Standard Control	YES, VITA62

COMPLIANCE	
VITA62	YES
MIL-STD-704 (B-F)	YES
MIL-STD-461	YES
MIL-STD-810G	YES
* ESD Protection	YES
* Shock	YES
* Vibration	YES
* Rapid Decompression	YES
* Corrosion Resistance	YES
* Fungus Resistance	YES
* Altitude	YES
* Humidity	YES

INPUT CHARACTERISTICS					
Parameter	Min.	Typ.	Max.	Units	Notes
Absolute Maximum Ratings					
Input Voltage					
- Non-Operating	-60		300	V	Continuous
- Operating	200	270	420	V	Continuous- Reverse input Protection
- Operating Transient Protection			450	V	100us transient, square wave
Isolation Voltage			4200	V	
Operating Temperature	-40		85	C	
Storage Temperature	-55		105	C	
Electrical Characteristics					
Input Voltage					
- Continuous	200	270	420	V	
- Transient			450	V	450V Transient for 40 ms
Under-Voltage Lockout					
- Turn-On Input Voltage Threshold	200	210	220	V	

INPUT VOLTAGE SPIKES SUPPRESSION (Vin Centered)	
+/- 450V, 100 us	MIL-STD-1275D
+/- 490V, 10 us	MIL-STD-461C (CS06); DEF-STAN 61-5
+/- 450V, 5 us	MIL-STD-461C (CS06)
+/- 600V, 10 us	RTCA/DO-160E


OUTPUT CHARACTERISTICS							
Parameter	+12V	+12V	+5V	+3.3V aux	+12V aux	-12V aux	Notes
Output Voltage Set Point, V	12	12	5	3.3	12	-12	Vin = 270VDC
- Drift -40 deg.C to 85degC +/- %	0.1	0.1	0.1	0.1	0.1	0.1	Vin = 270VDC
Output Voltage Trim Range, V	12	12	5	3.3	12	-12	Over Line/load/temp.
	+/- 10%	+/- 10%	+/- 10%	+/- 10%	+/- 10%	+/- 10%	Over Line/load/temp.
Output Voltage Ripple (pk-pk), mV	80	80	40	80	80	80	Full load with 1 uF + 10 uF tantalum/ceramic capacitor
Operating Current Range, A	0-40	0-40	0-40	0-20	0-3	0-3	1200W Total, combined Output
Over-Voltage Protection, V	13.6	13.6	5.6	3.7	13.6	-13.6	
Current Limit Inception, A	42	42	42	22	3.1	3.1	
Maximum Output Capacitance, mF	10	10	10	10	1	1	

MODULE designed to	
Test Name	Method
Random Vibration	MIL-STD-810, 514.6 - Procedure I, Class V3
Shock	MIL-STD-810, 516.6 - Procedure I, VI, Class OS2
Altitude	MIL-STD-810, 500.5 - Procedure I, II, III
Fungus Resistance	MIL-STD-810, 508.6
Corrosion Resistance	ASTM G85, Annex A4
Humidity	MIL-STD-810, 507.5 - Procedure II
High Temperature	MIL-STD-810, 501.5 - Procedure I, II
Low Temperature	MIL-STD-810, 502.5 - Procedure I, II
Temperature Cycling	MIL-STD-202, 107 - Class C4
ESD	EN61000-4-2, Level 4; 15kV Air Discharge

RELIABILITY CHARACTERISTICS

Calculated MTBF per MIL-HDBK-217F (GB) at 70 deg C. 4.1 280.000 Hrs.
Calculated MTBF per MIL-HDBK-217F (GM) at 70 deg C.0.92 280.000 Hrs.

Block Diagram:

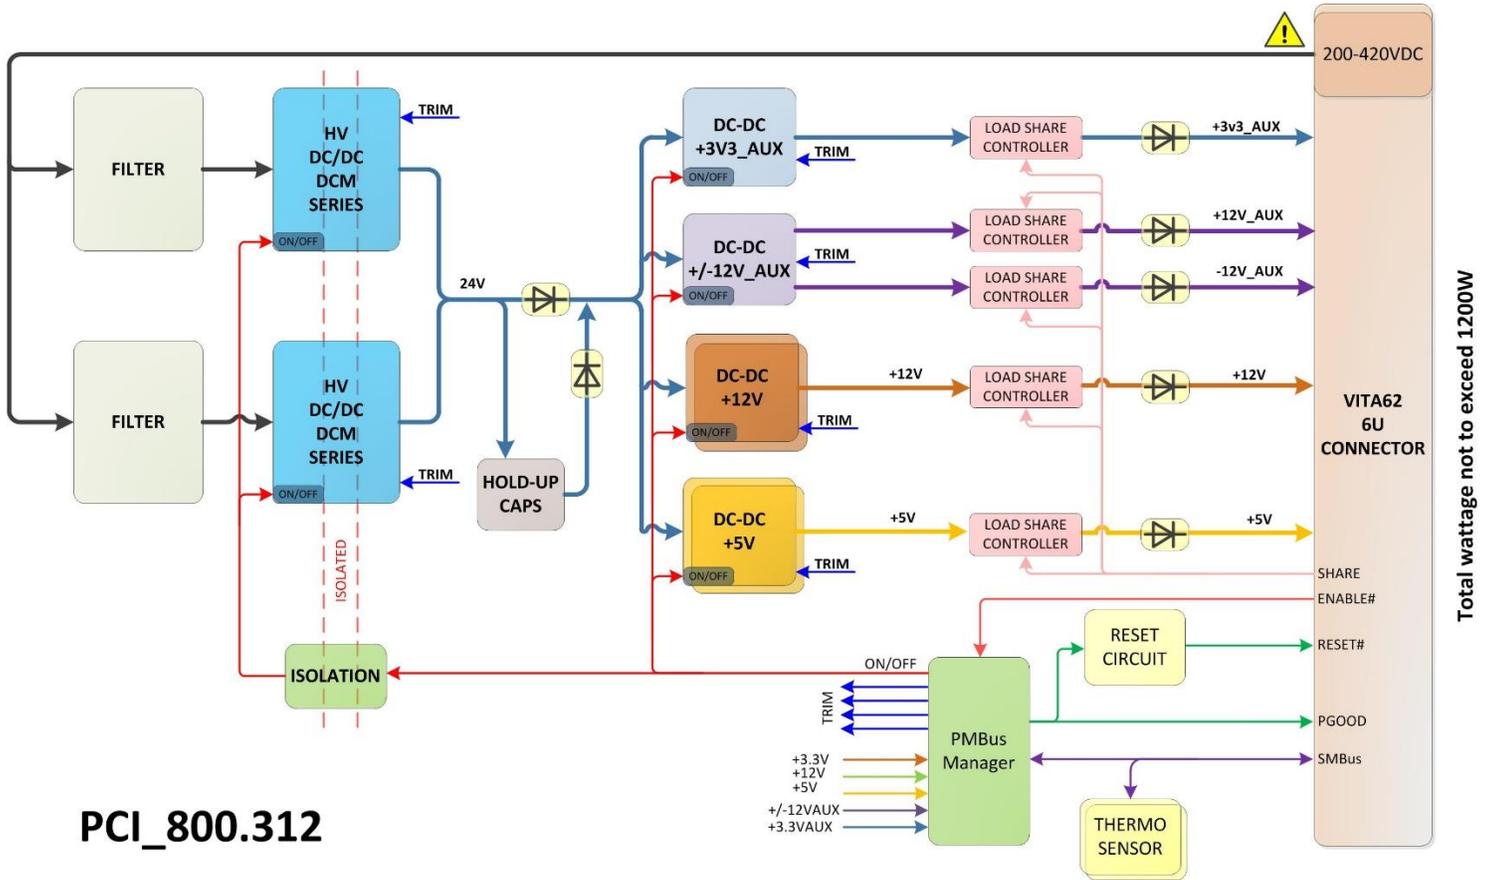

PCI_800.312



Pin-out: **As per VITA 62 specification**

Mechanical Dimensions: **As per VITA 62 specification (1" pitch)**

ORDERING INFORMATION:

PCI_800.312
PCI_800.312_C

6U VITA 621200W 270VDC Isolated Rugged Power Supply
Version with Conformal Coating

Release_October_04_2020